
CAMSO MEX HXD



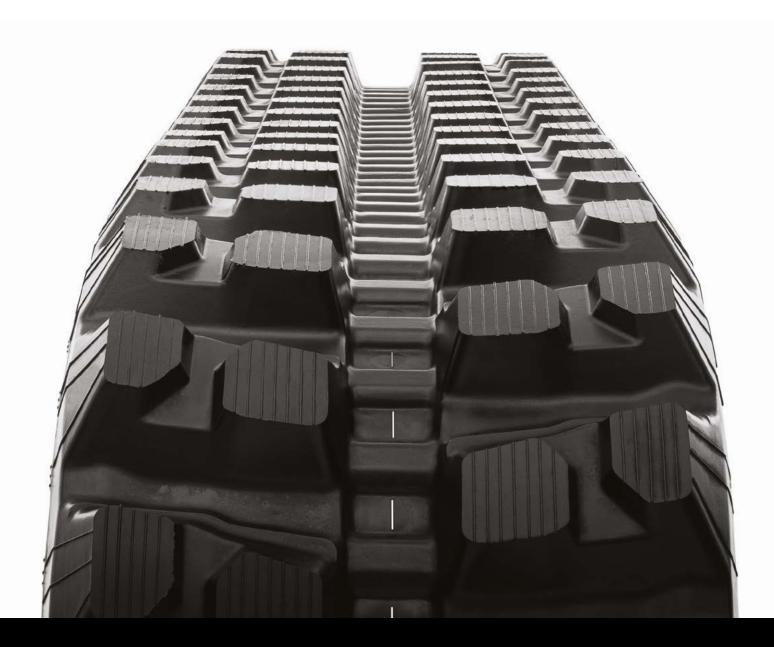

EXTREME RESISTANCE TO SEVERE CONDITIONS

A purpose-built solution for miniexcavators in harsh or extreme heavy-duty applications. Engineered to provide resistance against damage and catastrophic failure, they'll maximize your uptime.

PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION



CAMSO MEX HXD

PATENTED 3S INTERNAL IRON CORE

- Avoids unexpected downtime on job site and the beginning of the degradation process
- Minimizes vibrations for better ride quality and lower maintenance cost



HIGH-TENSILE, RUBBER SEALED STEEL CABLES PROTECTED BY HEAVY-DUTY CARCASS AND TREAD

 Resists carcass punctures and cable corrosion to extend service life

CURBSHIELD TECHNOLOGY WITH HEAVY-DUTY CARCASS


 Maximizes service life prior to track degradation process triggered by edge cutting leading to iron core corrosion and lower maintenance cost

WIDTH PITCH TREAD GUIDING METAL PIECE NAME CARCASS THICKNESS LUG HEIGHT METAL PIECE TYPE METAL PIECE SPECIFICATION 230 48 AH I KA 26.5 24.5 3S STANDARD 300 55 AH I SA 35 27.5 3S NARROW 300 55 AH I WA 35 27.5 3S WIDE 400 72.5 AH I WA 43 27.5 3S NARROW 400 72.5 AH I EA 45.5 27.5 3S RAILTYPE STANDARD 400 72.5 AH J EA 45.5 27.5 3S RAILTYPE STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET RAILTYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 81 A									
300 55 AH I SA 35 27.5 3S NARROW 300 55 AH I WA 35 27.5 3S WIDE 400 72.5 AH I WA 43 27.5 3S NARROW 400 72.5 AH I EA 43 27.5 3S ARIL TYPE STANDARD 400 72.5 AH J EA 45.5 27.5 3S OFFSET STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I AA 46.5 30.5 3S NARROW 450 83.5 AH J UA 47 27.5 3S OFFSET SANDARD <	WIDTH	PITCH	TREAD	GUIDING					
300 55 AH I WA 35 27.5 3S WIDE 400 72.5 AH I WA 43 27.5 3S NARROW 400 72.5 AH I EA 43 27.5 3S WIDE 400 72.5 AH J EA 45.5 27.5 3S ARIL TYPE STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5	230	48	АН	ı	KA	26.5	24.5	38	STANDARD
400 72.5 AH I WA 43 27.5 3S NARROW 400 72.5 AH I EA 43 27.5 3S WIDE 400 72.5 AH J EA 45.5 27.5 3S RAIL TYPE STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5	300	55	АН	I	SA	35	27.5	38	NARROW
400 72.5 AH I EA 43 27.5 3S WIDE 400 72.5 AH J EA 45.5 27.5 3S RAIL TYPE STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	300	55	АН	1	WA	35	27.5	38	WIDE
400 72.5 AH J EA 45.5 27.5 3S RAIL TYPE STANDARD 400 75.5 AH J WA 47 27.5 3S OFFSET RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	400	72.5	АН	I	WA	43	27.5	3S	NARROW
400 75.5 AH J WA 47 27.5 3S OFFSET RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	400	72.5	АН	1	EA	43	27.5	38	WIDE
400 75.5 AH J WA 47 27.5 RAIL TYPE STANDARD 450 71 AH I JA 48 30 3S STANDARD 450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	400	72.5	АН	J	EA	45.5	27.5	3S RAIL TYPE	STANDARD
450 76 AH I JA 48 30 3S STANDARD 450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	400	75.5	АН	J	WA	47	27.5		STANDARD
450 81 AH I OA 46.5 30.5 3S NARROW 450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	450	71	АН	1	JA	48	30	38	STANDARD
450 81 AH I AA 46.5 30.5 3S WIDE 450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	450	76	АН	1	JA	48	30	38	STANDARD
450 83.5 AH J UA 47 27.5 3S OFFSET RAIL TYPE STANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	450	81	АН	1	OA	46.5	30.5	38	NARROW
450 83.5 AH J UA 4/ 27.5 RAIL TYPE SIANDARD 485 92 AH I D 62.5 27 OFFSET STANDARD	450	81	АН	1	AA	46.5	30.5	38	WIDE
	450	83.5	АН	J	UA	47	27.5		STANDARD
500 92 AB I D 58 30 STANDARD STANDARD	485	92	АН	I	D	62.5	27	OFFSET	STANDARD
	500	92	AB	ı	D	58	30	STANDARD	STANDARD

TREAD WEAR TEST (150 hours)






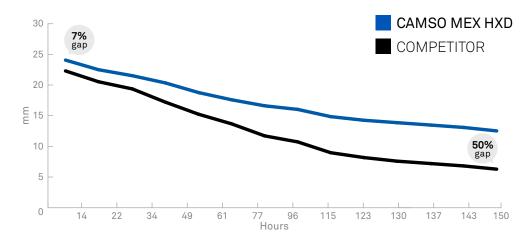

Camso tracks are designed with much thicker tread than most OEM tracks. Maintaining more rubber around the carcass offers more protection on carcass puncture and edge cutting. This all translates in longer service life and less downtime. The end result of this test is:

Camso MEX HXD offers
30% more service life.

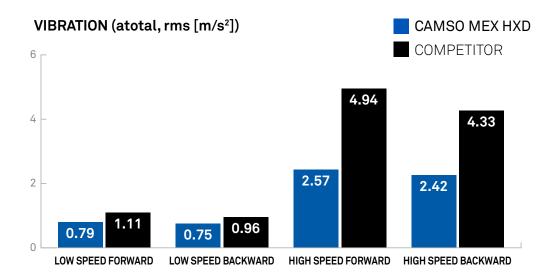

Throughout the entire test, the vibration level was 42% lower with the Camso tracks than the OEM quality track regardless the speed and the direction.

CAMSO MEX HXD

TREAD PATTERNS





AUTHORIZED DISTRIBUTOR:

camso.co

