

CAMSO ADT 753R

FORMERLY SOLIDEAL SRAT



ARTICULATED
DUMP TRUCKS



RADIAL PERFORMANCE MEETS HIGH TRACTION

A premium and versatile solution for tough articulated dump truck applications. Combining excellent traction, stability and durability, it's an excellent solution for a wide variety of surface conditions.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO ADT 753R



NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Increases traction and durability in off-road conditions

DEEP TREAD DEPTH

- Enhances traction in off-road conditions

HEAVY-DUTY DUAL-STAR CARCASS

- Optimizes stability for articulated dump truck applications


PREMIUM RUBBER COMPOUNDS

- Reduces heat build-up

| TIRE SIZE | TYPE | RIM SIZE | TIRE DIMENSIONS | | | APPLICATION | SI | LI | INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb] | | | | | | | | | | | |
|-----------|------|-----------|-----------------|----------------|--------------------|-------------|----|---------|--|------|------|-------|-------|-------|-------|--------|----------------|-------|---------|---|
| | | | O.D. [mm] [in] | O.W. [mm] [in] | O.T.D. [mm] [32nd] | | | | KPa | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | |
| | | | PSI | 29 | 36 | | | | 44 | 51 | 58 | 65 | 73 | 80 | 87 | 94 | | | | |
| 20.5R25 | TBLS | 17.00/2.0 | 1485 | 524 | 31 | Loader*/** | A2 | 186/193 | kg | 4750 | 5600 | 6300 | 7100 | 8000 | 8750 | 9500* | 10000 | 10900 | 11500** | |
| | | | | | | EM** | B | 168/177 | kg | - | - | 4750 | 5300 | 5800 | 6500 | 6900 | 7300 (5.25)** | - | - | - |
| | | | 58.46 | 20.63 | 39.1 | Grader** | A8 | 161/170 | kg | 3450 | 4125 | 4625* | - | - | - | - | - | - | - | - |
| 23.5R25 | TBLS | 19.50/2.5 | 1615 | 614 | 35 | Loader*/** | A2 | 195/201 | kg | 6000 | 7100 | 8250 | 9250 | 10300 | 11200 | 12150* | 12850 | 13600 | 14500** | |
| | | | | | | EM** | B | 176/185 | kg | - | - | 6000 | 6700 | 7500 | 8250 | 9000 | 9250 (5.25)** | - | - | - |
| | | | 63.58 | 24.17 | 44.5 | Grader** | A8 | 161/170 | kg | 4500 | 5300 | 6000* | - | - | - | - | - | - | - | - |
| 26.5R25 | TBLS | 22.00/3.0 | 1736 | 688 | 37 | Loader*/** | A2 | 202/209 | kg | 7500 | 9000 | 10300 | 11500 | 12850 | 14000 | 15000* | 16000 | 17000 | 18500** | |
| | | | | | | EM** | B | 184/193 | kg | - | - | 7500 | 8500 | 9500 | 10300 | 11200 | 11500 (5.25)** | - | - | - |
| | | | 68.35 | 27.09 | 46.6 | | | 184/193 | lb | - | - | 16500 | 18700 | 20900 | 22700 | 24700 | 25400 (76)** | - | - | - |
| 29.5R25 | TBLS | 25.00/3.5 | 1871 | 777 | 38 | Loader*/** | A2 | 208/216 | kg | - | - | - | - | 15500 | 17000 | 18000* | 19500 | 20600 | 22400** | |
| | | | | | | EM** | B | 191/200 | kg | - | - | 9250 | 10300 | 11500 | 12500 | 13600 | 14000 (5.25)** | - | - | - |
| | | | 73.66 | 30.59 | 47.9 | | | 191/200 | lb | - | - | 20400 | 22700 | 25400 | 27600 | 30000 | 30900 (76)** | - | - | - |

Tread depth 23.5R25 Updated May 2018 - Validated by CAMSO CON BU

LUG-TO-VOID RATIO

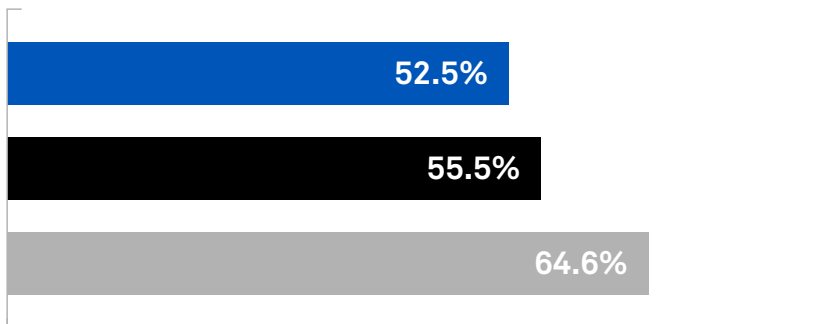

- CAMSO ADT 753R
- CAMSO WHL 753R NEW
- CAMSO WHL 753R 25% WORN

The Camso ADT 753R optimized lug-to-void ratio provides enhanced traction while its premium compounds and E3 depth minimizes heat build-up.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL