Since 1971, Arnco flatproofing products have been proven to perform under the worst conditions imaginable, ensuring the longest possible life out of your OTR tires. Arnco now helps to ensure that your OTR rims will withstand the test of time as well with Arnco TLC.


Even Your Wheels Deserve A Little TLC





5141 Firestone Place, South Gate, CA 90280 USA www.arnconet.com 1.800.821.4147

An Employee-Owned Company

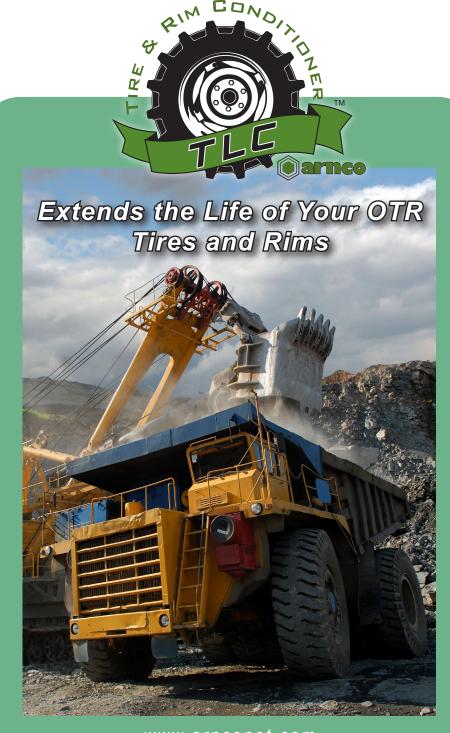

www.arnconet.com

ARNCO TLC BENEFITS

- Prevents and Reduces Rust on Wheel Assemblies
- Aids in Detecting Cracks in Wheel
 Assemblies
 - Faster and Easier Dismounts



• Environmentally Friendly

- Provides Cooler Running Tire and Wheel Assemblies
- 20% More Active Ingredients than Competitive Products
- Also Available in 'TLC Extreme" for Severe Colder Climates

Recommended TLC Quantity Chart for OTR Tires*									
2 GALLONS 8 LITERS	3 GALLONS 11 LITERS	4 GALLONS 15 LITERS	5 GALLONS 19 LITERS	6 GALLONS 23 LITERS	8 GALLONS 30 LITERS	10 GALLONS 38 LITERS	15 GALLONS 57 LITERS	20 GALLONS 76 LITERS	30 GALLONS 114 LITERS
12.00R24	18.00R25	18.00R33	24.00R35	24.00R35	45/65R45	33.00R51	37.00R57	40.00R57	ALL 63"
13.00R24	21.00R25	21.00R35	33.5R33	33.5R33	27.00R49	36.00R51	42/90R57	46/90R57	
14.00R24	20.5R25	18.00R49	29.5R35	29.5R35	30.00R51	37.5R51		48/95R57	
16.00R24	23.5R25	21.00R49	33.25R35	33.25R35	30 R 56.5	50/65R51			
14.00R25	26.5R25	26.5R29		24.00R35					
16.00R25	29.5R25	29.5R29		33.5R33					
15.5R25	16.9R28	33.25R29		29.5R35					
17.5R25	18.4R28	23.1R26		33.25R35					* Volumes
14.9R24	21L R 24	24.5R32							need to be increased by
16.9R24									30% when Arnco TLC is
17.5L R 24									used in bias-
19.5L R 24									ply tires