# **CAMSO SKS 782S**

# FORMERLY SOLIDEAL SAFETYMASTER SKS





# **SOLID OFF-ROAD TRACTION**

A solid skid steer tire solution for flat-free, off-road operation. Designed with durability in mind, it also provides excellent cleanout for improved off-road traction.

# **PERFORMANCE**

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



# **CAMSO SKS 782S**

### **FULL SOLID CONSTRUCTION**

Provides excellent durability and flat-free operation

### HAULER STEPPED TREAD DESIGN


■ Provides excellent cleanout for improved off-road traction


## **REUSABLE WHEEL**

■ Provides lower cost per hour and quicker installation

	RIM SIZE	ACTUAL TIRE DIMENSIONS					LOAD CAPACITY [kg] [lb]						
TIRE SIZE					HEEL		Counterbalanced lift trucks			Other vehicles			QL . I'
							Load wheel		Steering wheel	Other venicles		Static	
		O.D. [mm] <i>[in]</i>	O.W. [mm] <i>[in]</i>	0.T.D. [mm] [32nd]	Normal	Quick	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
<b>31x10-20</b> (10-16.5)	7.50	781	237	33		•	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42			-	8885	6835	8900	8100	6850	10350
<b>33x12-20</b> (12-16.5)	7.50	831	287	40	_		-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	-	•	-	11465	8820	11500	10400	8850	13350
<b>36x14-20</b> (14-17.5)	7.50	910	320	43			-	6175	4750	6175	5605	4750	7175
		35.8	12.6	54			-	13650	10500	13650	12350	10500	15850

# 33x12-20 7.50 SKS 782S

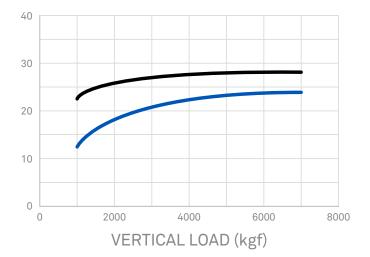



The Camso SKS 782S is a full-sized solid skid steer tire solution that maintains original equipment dimensions and improves stability.

CONTACT LENGHT (cm) CONTACT WIDTH (cm)

camso.co



